


# HVP-15HF

## High Voltage & High Frequency Oscilloscope Probe

### SPECIFICATIONS:

Max. Working Voltage	DC: 0~10KV DC AC: pulse $\leq$ 20KV peak to peak AC: sine wave $\leq$ 7KV rms
Single / Noise	DC $\geq$ 60dB(1KHz), $\geq$ 50dB(1MHz)
Bandwidth	DC~40MHz (-3dB)
Division Ratio	1 : 1000
Rise Time	$\leq$ 8.8ns
Input Resistance	100M $\Omega$ $\pm$ 1%
Input Capacitance	3.0PF $\pm$ 0.5PF
Compensation Range	5PF ~ 50PF
Cable Length	2.0 meter ( $\pm$ 0.2M)
Temperature Coefficient	$\leq$ 200PPM/ $^{\circ}$ C
DC Accuracy	$\leq$ 3% (DC to 10KV)
Safety App.	CE
Operating Temperature	0 ~ 50 $^{\circ}$ C
Storage Temperature	-20 ~ +70 $^{\circ}$ C
Weight / Volume	250g / $\phi$ 75 x 340 mmL.

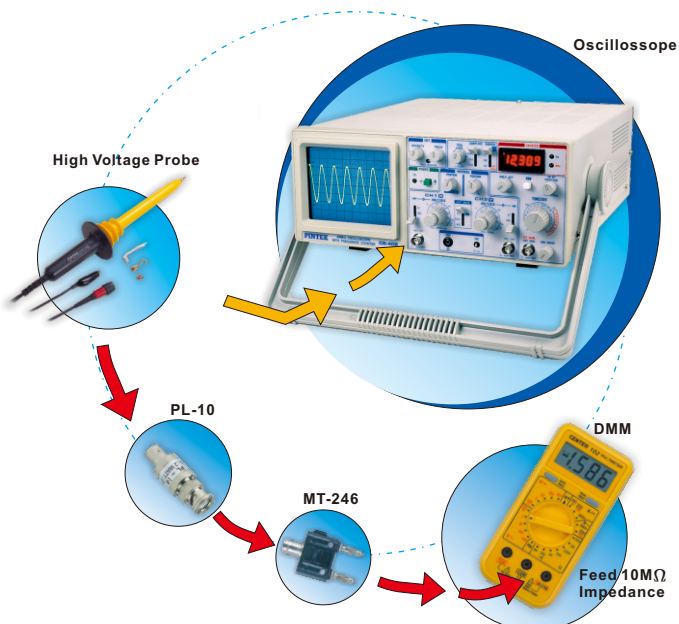

# PINTEK

## Pintek Electronics Co., Ltd

2F No.32 Tai-Pen Rd., Shulin Dist., New Taipei City, Taiwan

Tel: 886-2-86859562~3 ; 886-2-86861898

Fax: 886-2-86852081 ; 886-2-86861114

<http://www.pintek.com.tw>

E-Mail : [pintek@pintek.com.tw](mailto:pintek@pintek.com.tw) ; [pintek@ms26.hinet.net](mailto:pintek@ms26.hinet.net)

SALES AGENT